

Green-Markov models - new optimization strategies: a case study for user allocation in co-channel macro/femto networks

Diego L. Cardoso, Adamo L. de Santana, Marcelino S. da Silva, Carlos R. L. Francês, João C. W. A. Costa

Laboratory of High Performance Networks Planning, Federal University of Para, Augusto Correa Street, 01, CO 479 Brazil, {diego,adamo,marcelino,rfrances,jweyl}@ufpa.br

Solon V. de Carvalho, N. L. Vijaykumar

Laboratory of Computing and Applied Mathematics, National Institute for Space Research, Astronautas Av., 1758, Brazil, {solon,vijay}@lac.inpe.br

Abstract— The femtocell concept aims to combine fixed-line broadband access with mobile telephony using the deployment of low-cost, low-power third and fourth generation base stations in the subscribers' homes. While the self-configuration of femtocells is a plus, it can limit the quality of service (QoS) for the users and reduce the efficiency of the network, based on outdated allocation parameters such as signal power level. To this end, this paper presents a proposal for optimized allocation of users on a co-channel macro-femto network, that enable self-configuration and public access, aiming to maximize the quality of service of applications and using more efficiently the available energy, seeking the concept of Green networking. Thus, when the user needs to connect to make a voice or a data call, the mobile phone has to decide which network to connect, using the information of number of connections, the QoS parameters (packet loss and throughput) and the signal power level of each network. For this purpose, the system is modeled as a Markov Decision Process, which is formulated to obtain an optimal policy that can be applied on the mobile phone. The policy created is flexible, allowing different analyzes, and adaptive to the specific characteristics defined by the telephone company. The results show that compared to traditional QoS approaches, the policy proposed here can improve energy efficiency by up to 10%.

Index Terms— Femtocell, Green Network, Markov Decision Process, Optimized Allocation, Quality of Service.

I. INTRODUCTION

Studies conducted in recent years have revealed the explosive growth of wireless communications raised by technological advances in the telecommunication industry. The low price of the wireless terminals has also strongly contributed to the growth of the number of users. However, one of the main agents that have helped to increase the number of users is the ubiquitous wireless access to voice and data services. The use of mobile phones is a good example, now widespread in several layers of society. Data released from ANATEL (Telecommunication Regulating Agency in Brazil) indicate that Brazil ended the month of December 2011, with 242.2 million mobile phones and a density of 123.87

mobile phones per 100 inhabitants [1].

In this respect, femtocell technology obtained much attention from researchers, especially focusing on how it can be used to improve voice services in coverage limited locations [2]. In addition, broadband data services are an increasingly significant source and percentage of the mobile operator's business. For this purpose, femtocells have a strong potential to improve the capacity of the next generation wireless systems since they offer better link qualities and wider spectrum resources for connected users.

Scheduling in femtocell networks involves more complications due to involvement of multiple (typically co-channel) small-size cells, as well as the macro-cell. Besides, associating users to appropriate frequency bands for achieving high capacity and fairness, intelligent assignment of users to different cells is also required. In co-channel femtocell deployments, femtocells and macrocells are assigned the same spectrum, creating co-channel interference to each other. Moreover, there may be load imbalances in neighboring femtocells, where a certain femtocell may have significantly larger number of users compared to other femtocells in the vicinity. These unique problems in femtocell networks require intelligent scheduling algorithms that can present a good compromise between maximization of the fairness and the sum-rate [3].

This problem becomes more complex when the battery consumption of client nodes and the QoS (Quality of Service) requirements are considered to decide in which cell the client should connect. Traditionally, the decision is based on the signal power (connect to the cell with higher signal power, whether it is a macro cell or femtocell) without considering if the output meets the minimum QoS requirements.

The energy efficiency problem have obtained much attention in the last years, especially because of the rapid growth of energy consumption by user and network devices; for instance, the greenhouse effect has become increasingly severe, which is mainly caused by the excessive emission of Carbon dioxide (CO₂) since last century[4].

According to [5], 57% of the energy consumption of the Information and Communication Technology industry (ICT) is attributed to users and network devices in mobile and wireless networks, the scale of which is still growing explosively.

This proposal also targets to achieve the concept of Green Networking, which is the practice of selecting energy-efficient networking technologies and products, and minimizing resource use whenever possible [6]. It should be noted that maximizing the energy efficiency of the nodes is a key factor, however this is not the only one that should be considered; the maximization of user satisfaction should also be pursued.

In such context, planning for the allocation of users by operators in their cells, macro or femto, carries critical importance for minimizing interference, maximizing the system capacity, achieving fairness in femtocell networks and maximizing network utilization [3].

Literature has already proposed how to achieve high capacities with fair scheduling techniques for

conventional cellular architectures. For example, [7] aims to maximize the sum-rate of all the users within a cellular network; however, fairness issues have not been considered. A maximum fairness technique has been discussed in [8], which essentially tries to maximize the capacity of the user that has the lowest data rate and achieve similar data rates for all users. In [9], a capacity-maximizing power control and scheduling approach has been considered for neighboring femtocell networks; however, fairness perspectives have not been considered.

In terms of capacity overflow, some architectures and schedulers have been proposed. In [10] and [11], models based on Markov-modulated Poisson Process (MMPP) were employed for representing multiservice overflow traffic. However, extensive computations are required by a MMPP method to solve multi-dimensional Markov chains for large-scale systems.

Green communication techniques in mobile networks have been intensively studied across academia and industry. Some examples are [12], where it they propose power-saving scheduling of base stations (BS) considering QoS requirements (delay and jitter) of the real-time communications in WiMAX network. Also in [13] several radio management scheduling algorithms are evaluated for the LTE (Long Term Evolution) BS, and effectively explores multi-user diversity in the time, frequency and space domains for LTE networks. However literature in the area focused mainly on the energy efficiency of macro cells and core network, without much attention devoted to maximizing the use of battery of client nodes, considering aspects of QoS and signal level.

Due to the necessity of investigating the feasibility of providing QoS to guarantee minimum resources in Macro/femto networks, a Markov Decision Process has been developed to calculate the optimal policy for allocation of voice and data calls. Some traditional QoS parameters (throughput and packet losses) are used to compute the optimal policy. Moreover, always seeking the concept of green networking, the energy consumption is included as a parameter to be optimized.

This paper is organized as follows. In Sections II and III, the femtocell and Markovian Models concepts are explained. In Section IV, the analytical model of optimal allocation in macro/femto networks in 4G technology is shown. A validation process is presented in Section V, ensuring the reliability and efficiency of the model. The numerical results are presented in Section VI. Finally, Section VII shows the final remarks of this work.

II. FEMTOCELL

Femtocells, commonly know as home base-stations, are short range of tens of meters, low cost and low power access points. Femtocells are devices used to improve mobile network coverage in small areas, connected locally to mobile phones and similar devices through their normal 2G (GSM), 3G (UMTS) or 4G (WIMAX or LTE) connections, and then route the connections over a broadband internet connection back to the carrier, bypassing the normal cell towers (ERBs or nodeBs), know as macrocells.

This technology creates a bridge between mobile user and the operator's macro-network using the (personal or enterprise) wired networks, that is a high speed Internet connection. Doing this, it is easier to extend access to mobile network, providing better coverage for the population (especially in areas where there is no signal or there is just a weak signal), and providing high throughput to users.

Femtocells are typically installed by non-expert users that do not consider the network's performance; simply connecting a Femtocell Access Point to their personal Internet connection (e.g, using DSL (Digital Subscriber Line) or HFC (Hybrid Fiber-Coaxial) technology) and turning it on. Femtocell Access point self-organizes its radio and system operational parameters [14][15]. The node client automatically tries to associate the Femtocell Access Point with strongest signal, however this choice becomes unfair in two aspects:

1. Considering the capacity of the Femtocell Access Point, which can become overcrowded and cannot serve new users, maintaining the quality of service. This can lead to an unbalanced load, overloading a femtocell against each other;
2. Given the choice of allocation by the customer, the network setting only by the signal power level may not meet the quality requirements of the user, which could obtain a better service through another network near, even at a higher cost battery. This fact is aggravated when considering the diversity of existing applications, which have different requirements for quality of service.

III. MARKOV DECISION PROCESS

Markov Decision Process (MDP) is a mathematical tool used to analyze reactive complex systems to define the optimal control policy that minimizes the system's operational cost (or maximize the rewards).

In this paper, the problem is formulated as a Continuous Time MDP (CTMDP), since it considers that the times (between requests arrival and that a request stays in the system) follow an exponential probability distribution. Also, the problem is formulated as an Infinite Horizon problem, since it can perform for a long, undefined period of time.

Briefly, to model a problem as a CTMDP, it is necessary to define [16]:

- The state space S : the set of all possible conditions (states) of the system (as the number of requests of each kind of application in each cell);
- Sets of actions $\{A(s) \mid s \in S\}$: for each state $s \in S$, there is a set of possible actions $A(s)$, in which the operator must choose a single action at every decision time;
- A set of costs $\{c(s, a) \mid s \in S, a \in A(s)\}$: where $c(s, a)$ is the cost entailed to the system when it is in state $s \in S$ and a action $a \in A(s)$ is chosen;
- A set of transitions probabilities $\{p_{sz}(a) \mid s, z \in S, a \in A(s)\}$: where $p_{sz}(a)$ is the probability that, in

the next decision time, the system is in state $z \in S$, given that action $a \in A(s)$ is chosen when

it is in the state $s \in \mathcal{S}$;

- $\{\tau(s,a) \mid s \in \mathcal{S}, a \in A(s)\}$: expected time until the next decision time if the action $a \in A(s)$ is chosen in state $s \in \mathcal{S}$.

Using these five elements, the stationary optimal policy R^* that minimizes the long-run average cost per time unit can be calculated. For this purpose, there are some classical techniques that can be used, e.g. Value Iteration Algorithm, Policy Iteration Algorithm and Linear Programming [17].

Figure 1 shows a diagram representing the transition of states as a time dependent function. An event occurs in a given time t_n ; after this event, the system's state then changes and, simultaneously, a decision is made. Between the instants t_n and t_{n+1} , system behavior will depend on the state and the decision taken in t_n . In t_{n+1} a new event that changes the system's state occurs and the process restarts. The optimal policy calculated indicates which decision (action to be chosen) should be taken at each instant of time (t_{n-1} , t_n , t_{n+1} , and so on); this decision will be stationary and depend only on the state of system.

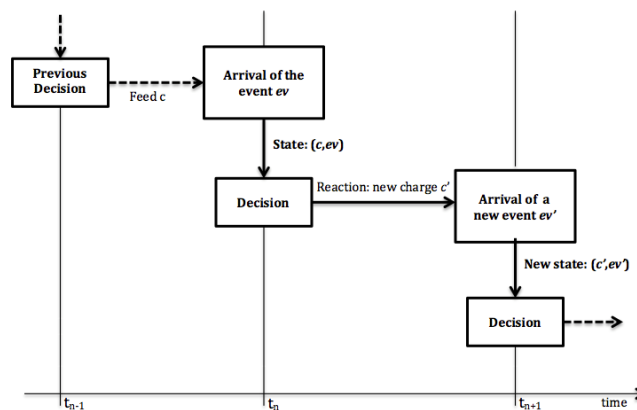


Fig. 1. Diagram representation of the state transition over time

IV. MODEL DEVELOPED

A. Network Architectures and Traffic Assumptions

A typical femto-macro mobile network, with cells providing wireless access for mobile users through macrocell or femtocell access points, is assumed. The architecture used is shown in Figure 2.

The arrivals of calls can be answered by both networks, which have different distances for the mobile nodes, different throughput, different losses and different number of maximum users that can be connected.

When a new call arrives to the system, parameters such as the energy consumption when connected, the available throughput and packet loss probability of each networks, are used to decide which network should be chosen to serve the call. If new calls are blocked due to capacity limitation, they overflow to the other network for possible service.

Two service classes access the network: voice and data. These two classes of traffic are formed by new calls and handoff calls. The requests arrive in the system according to two Poisson processes,

with parameters λv_n and λd_n , for voice and data respectively; where n indicates if the request is to connect to macrocell ($n=m$) or femtocell ($n=f$) or if it is a request that have to be decided to which cell it should connect ($n=u$).

The service times of voice calls and data packets follow exponential distributions with parameters $1/\mu v_n$ and $1/\mu d_n$, respectively. Also, there is no differentiation between voice and data channels.

It is important to clarify that the system is modeled as observed by the user. So, when the user needs to connect to make a voice or a data call, the mobile phone has to decide to which network to connect, using the information of number of connections, the quality of service parameters and the signal power level of each network. The signal power level can be obtained directly, but the other variables need to be inquired to the system.

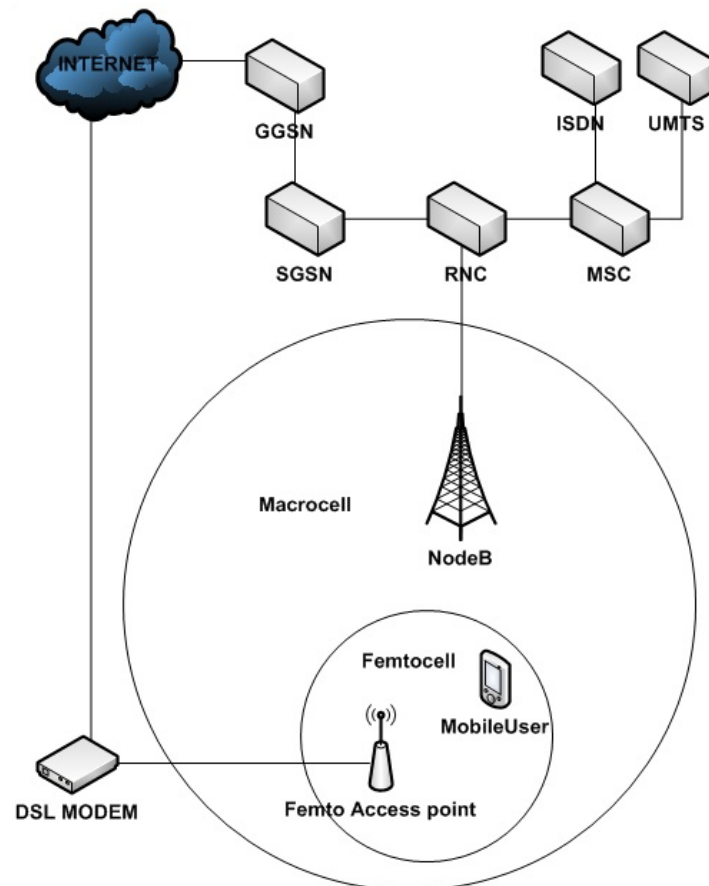


Fig. 2. Typical macro-femto scenario that is being taken into consideration

B. Problem Formulation

The objective of the Markov model proposed is to obtain, based on the system's state $s \in S$, a control policy that determines, whenever two separate networks (one femto and another macro) are eligible for connecting, to which network the mobile user must connect. This must take into consideration minimizing the medium and long term cost incurred in the system due to the energy consumed, losses in transmission and low throughput.

To achieve this control, the system must choose an action whenever an event occurs. The possible

events are:

- the voice calls arrival rates in macrocell and femtocell - λv_m and λv_f , respectively;
- the data calls arrival rates in macrocell and femtocell - λd_m and λd_f , respectively;
- the user arrival rates for voice and data – λv_u and λd_u respectively;
- the service rates of voice calls in macrocell, femtocell and that was allocated by the user – $\mu v_m, \mu v_f, \mu v_u$, respectively;
- the service rates of data requests in macrocell, femtocell and that was allocated by the user – $\mu d_1, \mu d_2, \mu d_u$, respectively.

In order to describe the state space S of the system, seven parameters of the system have to be observed:

- v_m : the number of voice connections on macrocell;
- d_m : the number of data connections on macrocell;
- v_f : the number of voice connections on femtocell;
- d_f : the number of data connections on femtocell;
- c : if the user is disconnected (*disc*) or connected to a macrocell (c_m) or femtocell (c_f);
- k : the type of applications, *voice* or *data* or *disc* (disconnected);
- ev : the last event waiting for a decision.

Using these parameters, each state $s \in S$ is defined as 7-tuple:

$$s = (v_m, d_m, v_f, d_f, c, k, ev)$$

subject to

$$\begin{aligned}
 &v_m, d_m \in \{0, 1, 2, \dots, MaxCR_m\} \\
 &v_f, d_f \in \{0, 1, 2, \dots, MaxCR_f\} \\
 &c \in \{disc, c_m, c_f\} \\
 &k \in \{disc, VOICE, DATA\} \\
 &ev \in \{\lambda v_m, \lambda d_m, \lambda v_f, \lambda d_f, \lambda v_u, \lambda d_u, \mu v_m, \mu d_m, \mu v_f, \mu d_f, \mu v_u, \mu d_u\} \\
 &v_m + d_m \leq MaxCR_m \\
 &v_f + d_f \leq MaxCR_f \\
 &if \ c = disc \ then \ k = disc \\
 &if \ c \neq disc \ then \ k = voice \ OR \ data \\
 &if \ ev = \mu v_m \ then \ (v_m = 1 \ AND \ (c = disc \ OR \ c = c_f \ OR \ k = data)) \ OR \ v_m > 1 \\
 &if \ ev = \mu d_m \ then \ (d_m = 1 \ AND \ (c = disc \ OR \ c = c_f \ OR \ k = voice)) \ OR \ d_m > 1 \\
 &if \ ev = \mu v_f \ then \ (v_f = 1 \ AND \ (c = disc \ OR \ c = c_m \ OR \ k = data)) \ OR \ v_f > 1 \\
 &if \ ev = \mu d_f \ then \ (d_f = 1 \ AND \ (c = disc \ OR \ c = c_m \ OR \ k = voice)) \ OR \ d_f > 1 \\
 &if \ c \neq disc \ then \ ev \in \{\lambda v_u, \lambda d_u\} \\
 &if \ c = c_m \ AND \ k = voice \ then \ v_m > 0 \\
 &if \ c = c_m \ AND \ k = data \ then \ d_m > 0 \\
 &if \ c = c_f \ AND \ k = voice \ then \ v_f > 0 \\
 &if \ c = c_f \ AND \ k = data \ then \ d_f > 0 \\
 &if \ ev = \mu v_u \ then \ k = voice \\
 &if \ ev = \mu d_u \ then \ k = data
 \end{aligned} \tag{1}$$

$MaxCR_m$ and $MaxCR_f$ are the maximum number of connections in the macrocell and femtocell, respectively.

The optimal policy to be calculated has to decide to which network the mobile phone has to connect when a voice or data call is requested (events λv_u and λd_u). Observe that the optimal policy will be in the mobile phone, so an action (reject or connect in femto or connect in macro) can be chosen for each call requested from the same mobile phone (events λv_u and λd_u), but it cannot choose an action for other mobile phones (events $\lambda v_m, \lambda v_f, \lambda d_m$ and λd_f). Also, for the events $\mu v_m, \mu v_f, \mu v_u$, and μd_u the only possible choice is accept the event, since they denote the end of the services. So, The set of possible actions $A(s)$ for each state $s \in S$ is defined as:

$$A(v_m, d_m, v_f, d_f, c, k, ev) = \begin{cases} \{accept\} & \text{if } ev \notin \{\lambda v_u, \lambda d_u\} \\ \{connect\ on\ macro, \\ connect\ on\ femto\} & \text{if } ev \in \{\lambda v_u, \lambda d_u\} \text{ AND } (v_m + d_m < MaxCR_m) \text{ AND } (v_f + d_f < MaxCR_f) \\ \{connect\ on\ macro\} & \text{if } ev \in \{\lambda v_u, \lambda d_u\} \text{ AND } (v_m + d_m < MaxCR_m) \text{ AND } (v_f + d_f = MaxCR_f) \\ \{connect\ on\ femto\} & \text{if } ev \in \{\lambda v_u, \lambda d_u\} \text{ AND } (v_m + d_m = MaxCR_m) \text{ AND } (v_f + d_f < MaxCR_f) \\ \{reject\} & \text{if } ev \in \{\lambda v_u, \lambda d_u\} \text{ AND } (v_m + d_m = MaxCR_m) \text{ AND } (v_f + d_f = MaxCR_f) \end{cases} \quad (2)$$

From the definition of the state space and possible actions for each state, we can define all possible transitions that take the system from a given state $s_j \in S$ to a state $s_i \in S$, when an action a is chosen. For this purpose, the information contained in Tables I and II are used.

First, the system's current state (s_j) is verified; from the element ev of s_j , an action $a \in A(s_j)$ is selected, according to the definition in equation (2); with these two pieces of information, the characteristic that indicates which states can be reached from s_j , when action a is selected, are determined. This procedure is summarized in Table I.

TABLE I. CURRENT STATE, ACTION SELECTED AND CHARACTERISTIC OF SUCCESSOR STATES.

State (s_i)	Action (a)	Characteristic of the Successor States (s_j)
$v_m, d_m, v_f, d_f, c, k, ev = \lambda v_m$	accept	$v_m + 1, d_m, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \lambda d_m$	accept	$v_m, d_m + 1, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \lambda v_f$	accept	$v_m, d_m, v_f + 1, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \lambda d_f$	accept	$v_m, d_m, v_f, d_f + 1, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c = disc, k = disc, ev = \lambda v_u$	reject	$v_m, d_m, v_f, d_f, c = disc, k = disc, ev = ?$
	connect on macro	$v_m + 1, d_m, v_f, d_f, c = c_m, k = voice, ev = ?$
	connect on femto	$v_m, d_m, v_f + 1, d_f, c = c_f, k = voice, ev = ?$
$v_m, d_m, v_f, d_f, c = disc, k = disc, ev = \lambda d_u$	reject	$v_m, d_m, v_f, d_f, c = disc, k = disc, ev = ?$
	connect on macro	$v_m, d_m + 1, v_f, d_f, c = c_m, k = data, ev = ?$
	connect on femto	$v_m, d_m, v_f, d_f + 1, c = c_f, k = data, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \mu v_m$	accept	$v_m - 1, d_m, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \mu d_m$	accept	$v_m, d_m - 1, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \mu v_f$	accept	$v_m, d_m, v_f - 1, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c, k, ev = \mu d_f$	accept	$v_m, d_m, v_f, d_f - 1, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c = c_m, k = voice, ev = \mu v_u$	accept	$v_m - 1, d_m, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c = c_m, k = data, ev = \mu d_u$	accept	$v_m, d_m - 1, v_f, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c = c_f, k = voice, ev = \mu v_u$	accept	$v_m, d_m, v_f - 1, d_f, c, k, ev = ?$
$v_m, d_m, v_f, d_f, c = c_f, k = data, ev = \mu d_u$	accept	$v_m, d_m, v_f, d_f - 1, c, k, ev = ?$

Next, Table II is consulted to identify all possible states that can be reached from s_f ; Thus, the successor state s_t will present the characteristic shown in Table I, with the element ev corresponding to the event responsible for taking the system from s_f to s_t ,

TABLE II. POSSIBLE EVENTS AND CONDITIONS FOR THESE EVENTS TO OCCUR.

Possible Event	Condition for the Event
λv_m	$v_m + d_m < MAXC_m$
λd_m	$v_m + d_m < MAXC_m$
λv_f	$v_f + d_f < MAXC_f$
λd_f	$v_f + d_f < MAXC_f$
λv_u	$c = desc$
λd_u	$c = desc$
μv_m	$(v_m = 1 \text{ AND } (c = dis \text{ OR } c = c_f \text{ OR } k = data)) \text{ OR } v_m > 1$
μv_f	$(v_f = 1 \text{ AND } (c = dis \text{ OR } c = c_m \text{ OR } k = data)) \text{ OR } v_f > 1$
μd_m	$(d_m = 1 \text{ AND } (c = dis \text{ OR } c = c_f \text{ OR } k = voice)) \text{ OR } d_m > 1$
μd_f	$(d_f = 1 \text{ AND } (c = dis \text{ OR } c = c_m \text{ OR } k = voice)) \text{ OR } d_f > 1$
μv_u	$k = voice$
μd_u	$k = data$

As an example, consider the current state of the system $s_f = (0, 1, 1, 0, disc, disc, \lambda v_u)$, then, referring to equation (2), the set of possible actions is $A(s_f) = \{connect\ on\ macro, connect\ on\ femto\}$. If action $a = connect\ on\ macro$ is selected, observing Table I, the possible successor states have the characteristic $(1, 1, 1, 0, c_m, voice, ?)$. From this point, it can be seen from Table II that the possible events are:

- λv_m , which leads the system to state $s_t = (1, 1, 1, 0, c_m, voice, \lambda v_m)$;
- λd_m , which leads the system to state $s_t = (1, 1, 1, 0, c_m, voice, \lambda d_m)$;
- λv_f , leading to state $s_t = (1, 1, 1, 0, c_m, voice, \lambda v_f)$;
- λd_f , leading the system to state $s_t = (1, 1, 1, 0, c_m, voice, \lambda d_f)$;
- μd_m , which leads the system to state $s_t = (1, 1, 1, 0, c_m, voice, \mu d_m)$;
- μv_f , which leads to state $s_t = (1, 1, 1, 0, c_m, voice, \mu v_f)$;
- and μv , which leads to state $s_t = (1, 1, 1, 0, c_m, voice, \mu v_u)$.

Since all events considered in this work represent Poisson processes, we can calculate the total output rate of each state s_f , when action a is selected, as:

$$\Lambda_{s_f}(a) = \sum_{\substack{s_t \in S \\ s_t \neq s_f}} \Lambda_{s_f s_t}(a) \tag{3}$$

where $\Lambda_{s_f s_t}(a)$ is the transition rate from state s_f to state s_t when action a is selected, given by the corresponding event. And the transition probability is calculated as:

$$p_{s_f s_t}(a) = \frac{\Lambda_{s_f s_t}(a)}{\Lambda_{s_f}(a)} \tag{4}$$

The expected time until the next decision epoch can be computed using:

$$\tau_{s_f}(a) = \frac{1}{\Lambda_{s_f}(a)} \quad (5)$$

The costs entailed to the system when it is in state s_f and the action a is chosen can be computed as the sum of three parts: (1) the consumption multiplied by the energy cost; (2) the loss multiplied by its cost; and (3) the cost entailed when the system transmits with a low throughput.

$$\begin{aligned} \alpha(s_f, a) = & \text{energyCons} \times \text{energyCost} \times \tau_{s_f}(a) + \\ & \text{loss} \times \text{lossCost} \times \tau_{s_f}(a) + \\ & \text{throughputCost} \times \tau_{s_f}(a) \end{aligned} \quad (6)$$

where:

- *energyCons* is the energy consumption and can be *energyCons_m* or *energyCons_f* when connected to macrocell or femtocell, respectively;
- *energyCost* is the energy cost and can be *energyCost_m* or *energyCost_f* when connected to macrocell or femtocell, respectively;
- *loss* is the probability of a packet loss and can be *loss_m* or *loss_f* when connected to macrocell or femtocell, respectively;
- *lossCost* is the energy cost and can be *lossCost_m* or *lossCost_f* when connected to macrocell or femtocell, respectively;
- *throughputCost* is the cost to transmit with reduced throughput.

The first two terms of the sum of the cost depends on the application (voice or data) and the network (macro or Femto) to which it is connected. The third element will be computed when the total throughput required by all the network's applications is greater than the network's capacity.

To obtain the policy that maximizes the expected return of the proposed system in the long term (optimal policy), the Iteration Values Algorithm [17] was used; and, to obtain the steady-state probabilities, i.e. the proportion of time the system spends in each state under the optimal policy, the Successive Overrelaxation (SOR) [17] was used.

V. VALIDATION

The validation process ensures that the model is running the way it was planned and targeted. Therefore, the model was validated to ensure its reliability and efficiency, enabling the analysis and investigation of several scenarios that may occur (changes in entrance arrival and service time for the both traffic classes, number of users, network capacity, defined costs, etc.). In this direction, three scenarios were implemented. In all these scenarios, the network parameters used were maintained, changing only the costs associated with the attribute that is to be minimized.

Table III presents the parameters used in all scenarios. In these scenarios, one parameter (energy consumption or packet losses or throughput) is chosen to be optimized (minimize its cost), so the cost

associated with this parameter is set to value 1 while all others costs are set to value 0. So, three scenarios were analyzed where just one parameter is considered for each scenario. Next, we describe all the three scenarios used in the process of model validation.

TABLE III. PARAMETERS AND NUMERICAL VALUES

Parameter	Value
$MaxCR_m$	10 connections
$MaxCR_f$	5 connections
$energyCons_m$	10.8 J
$energyCons_f$	7.6 J
$loss_m$	0.5 %
$loss_f$	2 %
Macrocell data rate	1 Mbits/s
Femtocell data rate	5 Mbits/s
Voice application data rate	12.2 kbytes/s
Data application data rate	144 kbytes/s
λv_1	2 requests/s
λd_1	10 requests/s
λv_2	1 request/s
λd_2	5 requests/s
λv_u	0.5 requests/s
λd_u	1 request/s
$\mu v_1 = \mu v_2 = \mu v_u$	0.25 requests/s
$\mu d_1 = \mu d_2 = \mu d_u$	2 requests/s

A. Scenarios

(a) First scenario (SCEN1): it aims to minimize energy consumption (search network with higher signal strength, thereby minimizing power consumption in transmission). This scenario is the closest to the traditionally implemented by the telephone operators. (b) Second scenario (SCEN2): The aim is to prioritize the network with the highest available throughput, maximizing its utilization. Only the value of the cost associated with the throughput is set to 1. (c) Third scenario (SCEN3): The network that offers better quality of service was prioritized, which in the model proposed here, is restricted to network with less package loss. This scenario seeks a higher Quality of Service (QoS) offered to the user. This approach is important because of the requirements by interactive applications, for example, the voice application, which has a higher sensitivity to the adversities of the network (end-to-end delay, package loss, throughput, jitter, etc.). Table IV shows all the parameters used in the three scenarios.

TABLE IV. PARAMETERS AND NUMERICAL VALUES

Parameter	SCEN1	SCEN2	SCEN3
$energyCost$	1	0	0
$lossCost_v$	0	0	1
$lossCost_d$	0	0	0
$throughputCost_v$	0	1	0
$throughputCost_d$	0	0	0

B. Results

Table V shows the results obtained for validation scenarios.

TABLE V. PARAMETERS AND NUMERICAL VALUES

Parameter	SCEN1	SCNE2	SCEN3
Average number of customers in macro network	5.76	5.76	5.97
Average number of customers in femto network	2,85	2.85	2.67
If macro network, probability of be voice	10,09%	10,09%	96,26%
If macro network, probability of be data	10,09%	10,09%	96,26%
If femto network, probability of be voice	89,91%	89,91%	3,73%
If femto network, probability of be data	89,91%	89,91%	3,73%
Average Battery Consumption	2.336	2.336	3.1487

It can be seen that the behavior of SCEN1 and SCEN2 are equivalent, which was expected, since in both cases, the femtocell network has the preferred attributes, which are superior signal strength and larger throughput. In these cases, approximately 89.91% of the requests were directed to this network, and after being completely full, the rest of the traffic, accounting for 10% of the total, were directed to macrocell network.

In SCEN3, the behavior was reversed, since most of the connections were directed to the macro network, corresponding to 96.26%. Decision justified by the characteristics attributed to her, that is have a smaller percentage of loss (0.5%) than the femtocell network (2%). The rest of the traffic was directed to femtocell network.

Another point worth highlighting is the cost of energy. The first 2 scenarios yielded the same value of consumption, because both scenarios are pointing toward the same output. In SCEN3, the output was chosen as the macro network, with an increase of 25.79% in power consumption. This is due to the macrocell to be more distant, causing higher energy costs for transmission.

In all scenarios, the model behaved as expected, without generating erroneous cases, showing that in addition to the reliability, the approach proposed here is flexible, allowing different analyzes and case studies.

VI. RESULTS

Table VI shows the costs used to perform the experiments to analyze the structure of the optimal policy.

TABLE VI. COSTS AND NUMERICAL VALUES

Parameter	Value
<i>energyCost</i>	20
<i>lossCost_v</i>	40 – 70
<i>lossCost_d</i>	20
<i>throughputCost_v</i>	70
<i>throughputCost_d</i>	30

Observe that the costs are dimensionless, since for losses and throughput overhead it is not possible to define monetary costs. These costs are used to weigh which parameter is more critical than the others.

In this paper, the energy cost was set to 20, while the cost for voice losses was set for a value between 40 and 70. However, it is important to note that the energy cost will be multiplied by the value of energy consumption and the losses cost will be multiplied by the amount of loss observed. The total weight for energy sums to 216 for the macrocell and 152 for the femtocell, while the total weight for losses on voice connections will be a value between 80 and 140. The same analysis can be performed for other costs, which shows that the energy has been used as the most critical parameter.

Analyzing the optimal policy, it is observed that when the voice loss cost is 40 (lower value) all requests from the user (voice or data) should be serviced by the femtocell; only when the femtocell is full the requests should be serviced by macrocell.

Increasing the loss cost it is observed that the data connections should be serviced by the femtocell and the voice calls should be serviced according to the femtocell congestion. While the congestion is low, the connection to femtocell is preferred, otherwise, connection to macrocell is preferred.

For a loss cost of 70 (the highest value observed) the optimal policy indicates that voice and data should be connected to macrocell. Only for congestion exceeding 80% the data requests should be serviced by femtocel.

Increasing the loss cost means reducing the battery consumption importance. However, Figure 3 shows that the average battery consumption has a limit, increasing up to 25,82%. Figure 3 displays the behaviour of variable $lossCost_v$ in the interval between 42 and 43, when a significant change in the power consumption is observed.

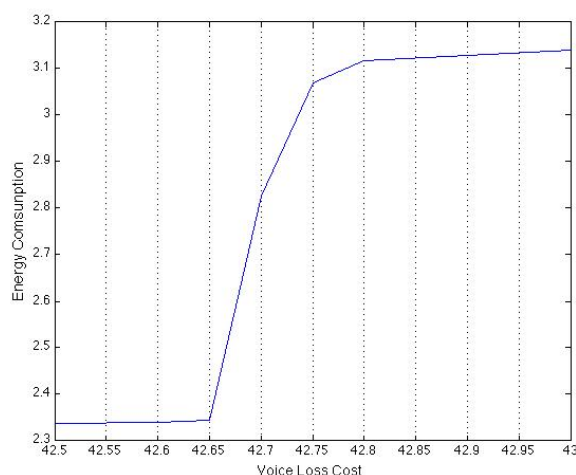


Fig. 3. Average battery consumption X voice loss cost.

Figure 4 shows the behavior of applications based on the change of the cost associated with loss of voice, so as to perform a sensitivity study how the cost of loss of voice impacts in the behavior and in the total cost of the model.

In the scenario presented, with the loss of voice at a cost of 40, their level of importance in the total cost is lower, making voice and data traffic to be served by femto network. However with the growth of $lossCost_v$, the importance of this variable factor in the total cost becomes higher, making the connections have a higher probability of being destined to the macro network.

This approach allows mobile operators to define optimal cost by analyzing different scenarios and therefore to structure their network and/or performing load balancing of users to meet the requirements stipulated, especially, anticipating the problems as blocking network, for example.

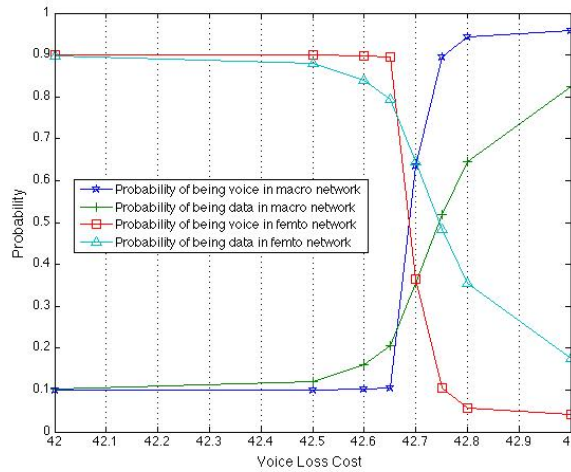


Fig. 4. $lossCost_v$ behavior.

Figure 4 shows that it is possible to divide the calls for each network according to the cost given to the voice loss. Moreover, it is observed that when the value of 42.7 is assigned as the cost for voice loss, the call flows for each network are closer. For this reason, a new scenario is made setting the cost of voice loss at 42.7, named as SCEN4, to obtain a more detailed analysis, comparing it with the scenario 1 of validation (SCEN1), which characterizes the typical situation where only the intensity of the received signal is observed; and with the scenario 3 of validation (SCEN3), which characterizes the search for the network with minimum data loss. Table VII presents the results for these three scenarios.

TABLE VII. PARAMETERS AND NUMERICAL VALUES

Parameter	SCEN1	SCEN3	SCEN4
Average number of customers in macro network	5.76	5.97	5.88
Average number of customers in femto network	2.85	2.67	2.75
Probability of being voice in macro network	10.09%	96.26%	63.46%
Probability of being data in macro network	10.09%	96.26%	35.45%
Probability of being voice in femto network	89.91%	3.73%	36.53%
Probability of being data in femto network	89.91%	3.73%	64.54%
Average Battery Consumption	2.336	3.1487	2.8267
Voice Throughput in Femto Network (requests/s)	0.12	0.005	0.05
Voice Throughput in Macro Network (requests/s)	0.014	0.135	0.09
Data Throughput in Femto Network (requests/s)	0.007	0.07	0.02
Data Throughput in Macro Network (requests/s)	0.007	0.07	0.02

When analyzed in terms of energy efficiency, the scenario SCEN4 achieves an increase of 21% in the consumption when compared with SCEN1, however when compared with SCEN3, it was obtained a reduction of approximately 10.22% in the energy consumption.

Considering the load distribution in SCEN4, it is observed that about 64% of voice calls are serviced by the macro network, which because of its lower rate of loss (of 0.5%), can serve with satisfaction the vast majority of users. Only a small percentage, approximately 35% (SCEN4) will be serviced by the femto network, which due to its 2% packet loss, it can create dissatisfaction among users, since the voice application tolerate losses at most 1% [18]. With respect to data traffic, it is observed an inversion of the result. This type of application use error correction protocols and retransmission of packets, and consequently, can tolerate data loss. Furthermore, the femto network has a higher throughput, allowing better data rates and thereby reducing the time for data transmission.

As emphasized earlier, the optimal police proposed is able to maintain a higher level of quality of service offered to users while it minimizes the energy consumption. This fact shows that the approach proposed here attempts to balance these two concepts, the Green Network and Quality of Service.

VII. CONCLUSIONS

Femtocells enable a coverage increase with a less load on the macrocells, thus relieving the mobile network, which was not initially developed for data traffic and is currently overloaded. However, the optimal allocation of available users between cells (macro or femto) is still an open problem.

The problem becomes even more complex when considering the energy efficiency of the batteries at client nodes, without affecting the quality of service offered.

Through an optimized allocation, this work sought to provide users the minimum levels of service quality, maximizing battery lifetime at client node. However, one must consider that the traffic used (voice and data) have specific characteristics (such as throughput, minimum levels of QoS, transmission cost), which generates different behavior at the time of transmission.

It can be seen, from the results, that voice connections should be designed to macrocells, which, despite having smaller bandwidths, can meet a higher number of voice calls, have a greater coverage area and lower levels of loss (due to congestion and interference). The data traffic should be directed to the femtocells, which have higher bandwidth, and that, even with a loss of data, can meet the minimum QoS of this particular application; mainly due to existing correction protocols in TCP/IP.

This approach seeks to assist mobile operators in their planning and network maintenance. It allows, for example, pricing strategies that encourage energy efficiency while maintaining quality of service to the users. This type of policy, that seeks energy conservation, must be sought by companies, to ensure standards and labels (seals) for energy efficiency, which enables the participation of specific tax credits and facilities, which instigates the market energy efficiency. However, the satisfaction of end users should not be overlooked. Thus, one must seek the middle

ground, between the consumption and the quality of service provided.

Thus, the following contributions can be seen as results of this work: (a) the proposal of a Markov optimization model for optimal allocation of users in macro-femto network, considering the type of traffic to be transmitted, (b) unlike from studies in literature, the model was built considering crosslayer aspects (bandwidth, signal strength) and energy efficiency (battery level) (c) Green Markov Models is developing library that includes studies of energy consumption and QoS in 3G/4G networks, optical networks and wireless sensors. For each network, a particular set of constraints of the network under study is included into the model, which gives reliable results and adapted to a specific technology.

As limitations, it is pointed that the model was implemented in a general way, not conducting specific studies, such as: (a) costs associated with handoffs (between macro and femto cell), (b) cost associated, with each new call, to choose which network to connect.

REFERENCES

- [1] Anatel, "Brazil closes 2011 with record mobile telephony", 2012. Available in: <http://www.anatel.gov.br/Portal/exibirPortalNoticias.do?acao=carregaNoticia&codigo=24506> (in portuguese).
- [2] Chandrasekhar V., Andrews J. G., and Gatherer A., "Femtocell Networks: A Survey". In *IEEE Commun. Mag.*, vol. 46, pp. 59–67, 2008.
- [3] Ertürk M. C., Güvenc I., Arslan H., "Femtocell gateway scheduling for capacity and fairness improvement in neighboring femtocell networks". In *Proc. IEEE CogCloud Workshop (co-located with IEEE PIMRC 2010)*, Istanbul, Turkey, 2010.
- [4] Wang X., Athanasios V. Vasilakos, Min Chen, Yunhao Liu, Ted "Taekyoung" Kwon, "A Survey of Green Mobile Networks: Opportunities and Challenges", in *ACM/Springer Mobile Networks and Applications (MONET)*, Vol. 17, No. 1, pp.4-20, Feb, 2012.
- [5] McLaughlin S., "Green radio: the key issues— programme objectives and overview". *Wireless World Research Forum*, 2008.
- [6] SearchNetworking, "Green Networking", 2009. Available in: <http://searchnetworking.techtarget.com/definition/green-networking>.
- [7] Zhang Y. J., and Letaief K. B., "Multiuser adaptive subcarrier and bit allocation with adaptive cell selection for OFDM systems. In *IEEE Trans. Wireless Commun.*, vol. 3, no. 4, pp. 1566–1575, 2004.
- [8] Rhee W. and Cioffi J. M., "Increase in capacity of multiuser OFDM system using dynamic subchannel allocation". In *Proc. IEEE Vehic. Technol. Conf. (VTC)*, Tokyo, Japan, pp. 1085–1089, 2000.
- [9] Kim J. Y., and Cho D. H., "A joint power and subchannel allocation scheme maximizing system capacity in dense femtocell downlink systems". In *Proc. IEEE Int. Symp. Personal, Indoor, Mobile Radio Commun. (PIMRC)*, Tokyo, Japan, 2009.
- [10] Chung S. P. and Lee J. C., "Performance analysis and overflowed traffic characterization in multiservice hierarchical wireless networks". In *IEEE Trans. Wireless Commun.*, vol. 4, no. 3, pp. 904–918, 2005.
- [11] Hu L. R. and Rappaport S., "Personal communication systems using multiple hierarchical cellular overlays". In *IEEE J. Sel. Areas Commun.*, vol. 13, no. 2, pp. 406–415, 1995.
- [12] Liao W. H., Yen W. M., "Power-saving scheduling with a QoS guarantee in a mobile WiMAX system". In *J NetwComput Appl* 32(6):1144–1152, 2009.
- [13] Han C., Beh K. C., Nicolau M., Armour S., Doufexi A., "Power efficient dynamic resource scheduling algorithms for LTE". In *Proceedings of IEEE VTC-fall*, 2010.
- [14] Holger C., Lester T. W. H., and Louis G. S., "An Overview of the Femtocell Concept". In *Bell Labs Technical Journal*, Vol. 13(1), pp.221246, 2008.
- [15] John D. H. and Holger C., "Deployment Options for Femtocells and Their Impact on Existing Macrocellular Networks", In *Bell Labs Technical Journal*, Vol. 13(4), pp.145160, 2009.
- [16] Puterman, L. M., "Markov Decision Processes: Discrete Stochastic Dynamic Programming". John Wiley & Sons, 1994.
- [17] Tijms, H. C., 1994. *Stochastic models: an algorithmic approach*. John Wiley & Sons.
- [18] Coverdale P., "ITU-T Study Group 12: Multimedia QoS requirements from a user perspective," *Workshop on QoS and user perceived transmission quality in evolving networks*, Oct, 2001.